

Ammo Box

Featured Product

Honeywell's unique Ammo Box packaging provides security professionals with an entirely new level of installation convenience and inventory control. Each Ammo Box contains an “ammo belt” of 50 individually packaged magnetic contacts complete with screws, spacers and covers. Simply tear off the perforated, incrementally numbered bag. The number on the next bag indicates the quantity left in the Ammo Box.

Ammo boxes not only eliminate the frustration of digging through loose parts or sorting through mismatched sets—they make purchasing contacts simple. You can select the exact amount required for an individual installation or purchase the ultra-convenient Ammo Box of 50.

➔ Look for contacts featuring the “Available in Ammo Box” symbol throughout this catalog!

**Available in
Ammo Box**




Ammo Box Magnetic Contacts

- 50 individually packaged contacts per Ammo Box
- Perforated bags let you take only as many as needed
- Each bag contains all needed parts, including screws, spacers, etc.
- Sequential numbers on bag tell you how many are left in the box

Honeywell

Surface Mount



Available in
 Ammo Box

Available
October
2005

7939WG Magnetic Contact

- Ideal for residential or commercial use
- Standard gap: 1-1/4" (32mm)
- Spacers, covers and screws included

ORDERING:

7939WG-WH – White

7939WG-BR – Brown

7939WG-GY – Grey

7939WG-WH-M – Extra magnet (10 pack)


7939WG-BR-M – Extra magnet (10 pack)

7939WG-GY-M – Extra magnets (10 pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 300ma @ 30VDC

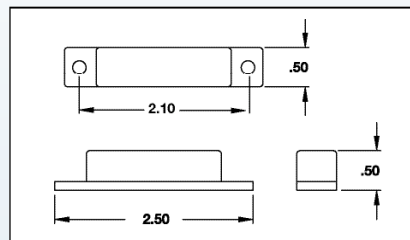

REPLACES:

- ADEMCO PR20439, 7939, 7939W
- Aleph DC2541, DC2541-WG
- FBII ZR735
- GRI 29A
- Intellisense MPS20
- Nascom N-85T
- Sentrol 1085T, 1285T
- Tane SM35

Surface Mount



7939-2

Magnetic Contact

- SPDT (Form C) Contact
- Standard gap: 1" (25mm)
- Spaces, covers and screws included
- Cover conceals end of line resistor (EOL)

ORDERING:

7939-2WH – White

7939-2BR – Brown

7939-2GY – Grey

7939WH-M– Extra magnet (10 pack)


7939BR-M– Extra magnet (10 pack)

7939GY-M– Extra magnets (10 pack)

SPECIFICATIONS:

Switch Type: Form C (SPDT) Reed

Contact Rating: 100ma @ 28VDC

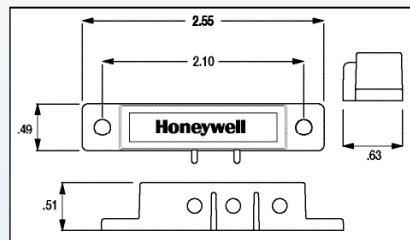

REPLACES:

- GRI 29C
- Sentrol 1087T

Surface Mount



Available in
 Ammo Box

7940

Universal Magnetic Contact

- The most versatile mounting options of any contact available – screw mount, adhesive mount or recess
- Super wide gap of 2" (51mm) is standard or 1" (25mm) end-to-end recessed
- Insulation displacement terminals eliminate stripping or soldering, just insert wires and tighten
- Recess adapter plugs included

ORDERING:

7940WH – White

7940BR – Brown


7940WH-M – Extra magnet (10 pack)

7940BR-M – Extra magnet (10 pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

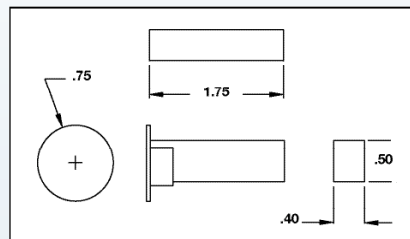

Patent # 5,476,397

REPLACES:

- Amseco AMS51
- Sentrol 1038T, 1038-M, 1082TW-M, 1285TW-N
- Tane-50

Surface Mount



Available in
Ammo Box

Available
October
2005

943WG

Mini Magnetic Contact

- Standard gap: 1" (25mm)
- 12" (30cm) leads
- Self-adhesive or screw mount

ORDERING:

943WG-WH – White

943WG-BR – Brown


943WG-WH-M – Extra magnet (10 pack)

943WG-BR-M – Extra magnet (10 pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 300ma @ 30VDC

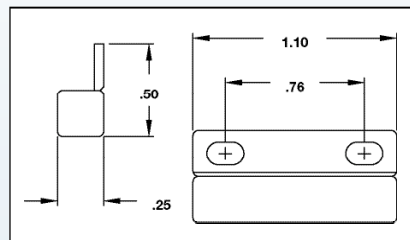

REPLACES:

- ADEMCO PR20443, 943
- Aleph DC-1561, DC-1551-WG
- GRI 50F-12
- Intellisense MPS45
- Nascom N25
- Sentrol 1145, 1032, 1035

Surface Mount

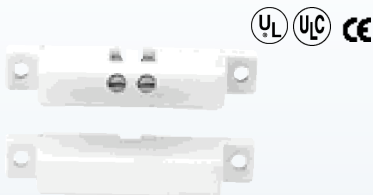

Available in
 Ammo Box

945T Miniature Magnetic Contact with Screw Terminals

- Screw mount or adhesive mount
- Screw terminals eliminate wire splicing and soldering
- Standard gap: 1-1/8" (29mm)

ORDERING:

945T-WH – White

945T-BR – Brown

945T-GY – Grey

945WH-M– Extra magnet (10 pack)


945BR-M– Extra magnet (10 pack)

945G Y-M– Extra magnet (10 pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

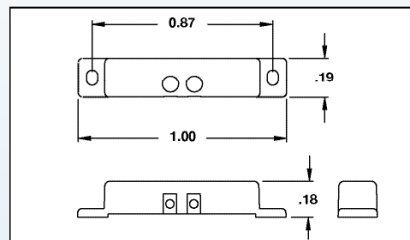

REPLACES:

- Aleph DC-2531-WG
- GRI 100T, 110T
- Sentrol 1038T, 1138T
- Tane-60


PAL-T

Featured Product

There's a reason why Honeywell's PAL-T contacts are so popular.

Convenience. The revolutionary, one-piece mini surface mount contact features a patented hinged cover that eliminates the hassle of loose parts. Installations are as simple as mounting, wiring, and snapping the case closed!

Despite its small size, the UL, ULC and CE listed PAL-T contact features a 1-1/8" gap—reducing false alarms while speeding up installation time.

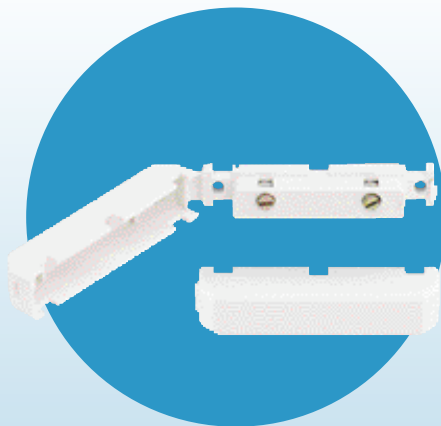

PAL-T

Honeywell Exclusive

Patent # 6,135,826

Honeywell

Surface Mount



Available in
Ammo Box

PAL-T Magnetic Contact

- Patented hinged case cover—no loose parts
- Concealed screw terminals eliminate splicing and soldering
- 1-1/8" (29mm) gap makes installation a snap
- Screw mount or adhesive mount
- Six wire entry points for mounting versatility
- Conceals EOL resistor

ORDERING:

PAL-T-WH – White

PAL-T-BR – Brown

PAL-T-GY – Grey

PAL-WH – With 5' leads (5 pack)


PAL-M-WH – Extra magnet (10 pack)

PAL-M-BR – Extra magnet (10 pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

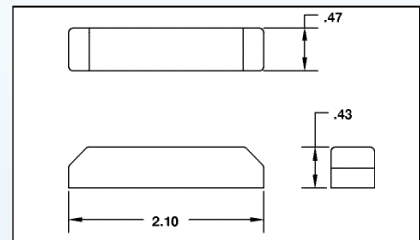

Patent # 6,135,826


REPLACES:

- Aleph DC-2531
- GRI 100T, 100TC, 110T
- Sentrol 1038T
- Tane-60

Surface Mount



Available in
Ammo Box



940 Magnetic Contact

- Miniature size perfect for homes and offices
- Attractive cover keeps mounting screws and terminals screws hidden
- Standard gap: 3/4" (19mm)
- Complete with spacers and mounting screws
- Cover hides EOL resistor

ORDERING:

940WH – White

940BR – Brown


940WH-M – Extra magnet (10 pack)

940BR-M – Extra magnet (10 pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 100ma @ 28VDC

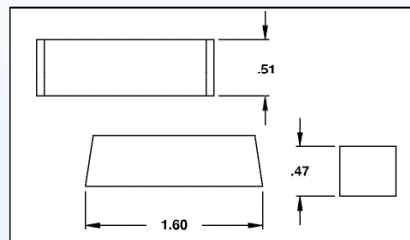

REPLACES:

- Aleph PS-1523
- GRI 29A, 129A
- Nascom N285T
- Sentrol 1085T, 1285T

Surface Mount



950 Magnetic Contact

- Completely hides mounting screws and terminals
- Standard gap: 1-3/4" (45mm)
- Ideal for concealing end-of-line resistor (EOL)

ORDERING:

950BR – Brown

950GY – Grey


950W-BR – Brown: wide-gap 2-1/4"(57mm)

950W-GY – Grey: wide-gap 2-1/4"(57mm)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 100ma @ 28VDC

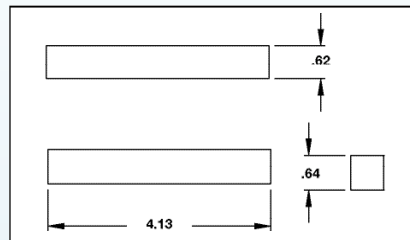

REPLACES:

- GRI 400
- Sentrol 1045T

Surface Mount

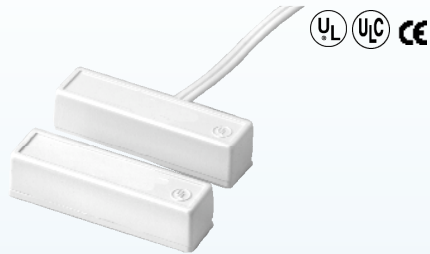

945

Adhesive Mount Magnetic Contact

- Adhesive mount
- Standard gap: 1-1/4" (32mm)
- External test points standard
- 15 ft. leads (4.6m)
- Package Quantity 5 per bag

ORDERING:

945WH – White

945BR – Brown


945WH-M – Extra magnet (10 pack)

945BR-M – Extra magnet (10 pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 100ma @ 28VDC

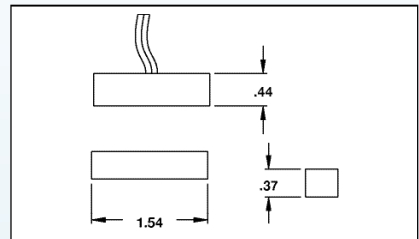

REPLACES:

- Aleph PS1541
- GRI 100-12, 110-12
- Nascom N35
- Sentrol 1035
- Tane FM106

Surface Mount



PR-20445

Magnetic Contact with Leads

- Screw or adhesive mount
- 18" (46 cm) long wire leads
- Adhesive pads are pre-applied for fast easy installation – they do not need not be removed for screw mounting
- Standard gap: 1-1/4" (32mm)

ORDERING:

PR-20445WH – White

PR-20445BR – Brown


PR-20445WH- M – Extra magnet (10 pack)

PR-20445BR- M – Extra magnet (10 pack)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 100ma @ 28VDC

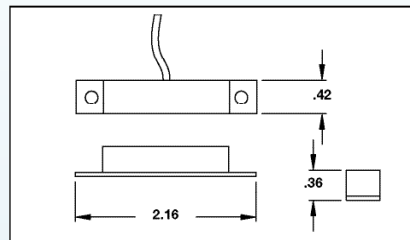

REPLACES:

- Aleph PS1541
- GRI 110-12
- Nascom N35
- Sentrol 1082-N, 1085
- Tane FM106

Surface Mount



949

Magnetic Contact with Leads

- Screw mount
- External test points standard
- Standard gap: 1-1/4" (32mm)
- Complete with spacers and mounting screws

ORDERING:


949-WH – White

949-BR – Brown

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

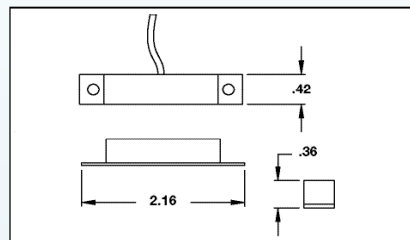

REPLACES:

- Aleph PS1541
- GRI 100-12
- Nascom N35
- Sentrol 1035-N, 1085, 1085-M, 1085-N
- Tane FM106