

DHI-HY-SSDZ

4-Wire Commercial Sounder Strobe Base



- Reliable communication: Completes EMC test, it has strong anti-electromagnetic interference ability, high stability and reliability
- Ultra-low power consumption: Ultra-low monitoring current and operating current
- Flexible installation: Non-loosening screws on base terminal for easy installation
- High endurance: Contacts material is highly acid-resistant and rust-resistant
- Obvious prompt: With a clear light on and accompanied by the sound of a buzzer, it highlights the occurrence of a fire

System Overview

DHI-HY-SSDZ Sounder Strobe Base is a mated product of both the Conventional & Addressable Fire Alarm Control Panel. It sends out an audible and light alarm signal to remind people when fire occurs.


Scene

It is suitable for hotels, shopping malls, office buildings, underground garages, and other crowded or large buildings.


Technical specification

Product Name	Sounder Strobe Base
Product Model	DHI-HY-SSDZ
Monitoring Area	Installation height below 4 m, 150 m ² ; 4 m-12 m, 80 m ²
Alarm Method	Light alarm, sound alarm
Operating Voltage	DC24V
Operating Current	Alarm current: ≤19 mA
Operating Temperature	—10°C ~ +55°C
Operating Humidity	≤95%, no condensation
Alarm Volume	≥65 dB @ 3 m (A)
Dimensions	136.9 mm × 36.5 mm (5.39" × 1.44") (with Base) 136.9 mm × 30 mm (5.39" × 1.18") (without Base)
Weight	194 g (0.428 lb) (with Base) 137 g (0.302 lb) (without Base)
Installation Method	Ceiling mount/Wall mount
Illumination	58 lux

Dimensions (mm/inch)

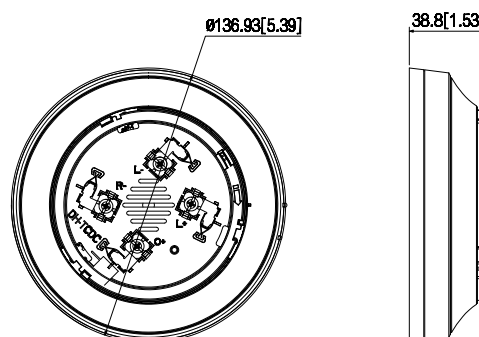

Installation

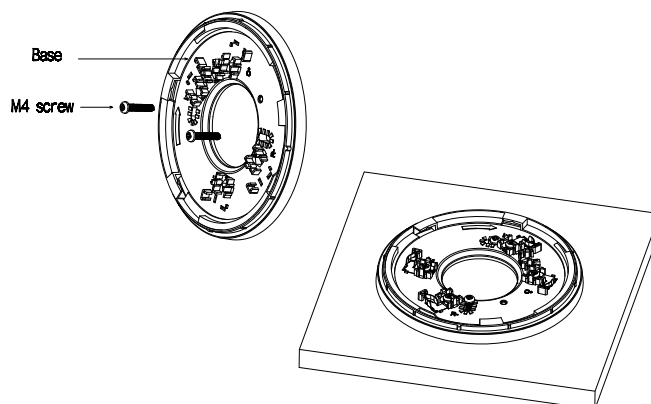

Ordering Information

Type	Model	Description
Sounder Strobe Base	DHI-HY-SSDZ	4-Wire Commercial Sounder Strobe Base