


Strobe - 29 Candela, Hazardous Location XB11

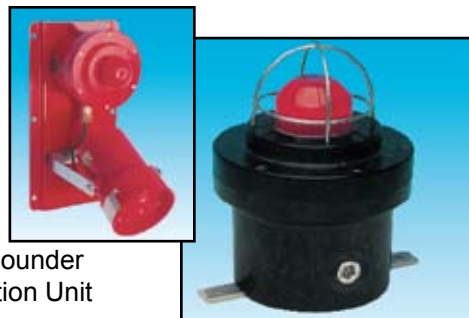

Strobe/Sounder
Combination Unit

Description:

These certified strobes have been designed for use in potentially explosive gas and dust atmospheres and harsh environmental conditions. The glass reinforced polyester enclosures are suitable for use offshore or onshore, where light weight combined with corrosion resistance is required.

The strobe housing is manufactured completely from a U.V. stable, glass reinforced polyester. Stainless steel screws and mounting bracket are incorporated ensuring a totally corrosion free product.

Units can be painted to customer specification and supplied with identification labels.

Features*:


- UL Listed for USA and Canada
 - Hazardous locations:
 - Class I, Div 2, Groups C & D
 - Class I, Zones 1 & 2, AExd IIB T5
 - Ordinary locations: Visual-Signal Device
- California State Fire Marshal (CSFM) Listed
- ATEX approved
- NEMA 4x & 6, IP66 and IP67
- Certified temperature -67°F to $+158^{\circ}\text{F}$ (-55°C to $+70^{\circ}\text{C}$)
- Corrosion resistant GRP
- Optional stainless steel backstrap
- Various lens colors
- Optional lens guard
- 29 candela
- 4 wire monitored connection
- Available as a status light
- Xenon
- 24 VDC, 110 and 240 VAC

Architects and Engineers Specifications

Strobes for hazardous locations and harsh environments shall be UL and cUL listed for Class I, Division 2, Groups C&D, and Class I, Zones 1&2, AExd IIB T5 applications and shall be listed under UL Standard 1638 for Indoor/Outdoor use. The strobe appliances shall be constructed of lightweight, UV stable glass reinforced polyester, shall be corrosion resistant, and shall meet NEMA 4x, NEMA 6, IP 66 & IP 67 environmental requirements over a temperature range of -67°F to 158°F (-55°C to 70°C).

The strobe shall be rated to flash at 1 Hz with 29 candela per flash. Rated current draw shall not exceed 320 mA at 24 vdc. The strobe shall be capable of direct surface mounting in any direction.

Note: Due to continuous development of our products, specifications and offerings are subject to change without notice in accordance with Cooper Wheelock standard terms and conditions.

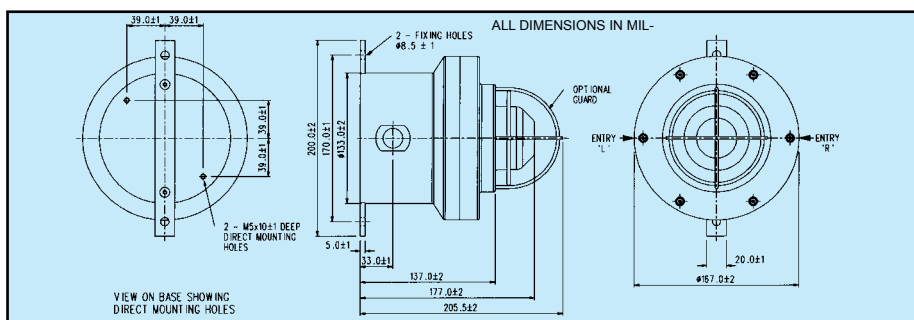

Specification

Certification:	UL Listed for USA and Canada to: – Hazardous locations: Class I, Div 2 Groups C & D. Class I, Zones 1 & 2 AExd IIB T5. UL Listing No: E187894. – Ordinary locations: Visual-Signal Device. California State Fire Marshal (CSFM) Listed UL listing No. S8128. ATEX approved: EExd IIB T5/T6 Cert. No. 99 ATEX 2195X CENELEC EN50014 and EN50018
Material:	Body: – Glass reinforced polyester (GRP). Lens: – Glass. Cover Screws + Backstrap: – Stainless steel 316.
Finish:	Natural black or painted to customer specification.

Weight:	5.5 lb./2.5Kg.
Certified Temperature:	–67°F to +158°F (–55°C to +70°C) hazardous locations –67°F to +131°F (–55°C to +55°C) ordinary locations
Ingress Protection:	NEMA 4x & 6, IP66 & IP67.
Terminals:	6 x 14AWG
Labels:	Duty/Tag Label optional.
Entries:	2 x 1/2" NPT
Strobe/Sounder Unit:	The strobe may be combined with a sounder to create a visual/audible alarm.

	DC	AC50/60 Hz	
Voltage	24	110	240
XB11 Tube Energy (Joules)	5	5	5
Peak Current Consumption (mA)	320	100	60
Effective Intensity (Cd)	29	29	29

NOTE: The Cd figures are for a clear lens @ 1Hz flash rate.

FOR COLORED LENSES

Color	Red	Blue	Amber	Green	Yellow
Multiplying Factor	0.15	0.12	0.51	0.49	0.86

The photometric data has been verified by BSI.
A report is available if required.

Configuration Options:

The following code is designed to help in the selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Certification	Voltage	Flash Rate	Lens Color	Lens Guard	Unit Fixing	Earth Continuity	Tag/Duty Label	Other Options	Unit Finish
XB11						N			
Certification Code		Color Code		Guard Code			Label Code	Option Code	
UL	UL	Red R		None N			None N	Blanking Plug P	
UL (Ordinary location) UW		Blue B		Yes Y			Yes* Y	None N	
		Green G					*(Please specify)		
		Amber A			Unit Fixing Code				
		Yellow Y			Direct Mounting D				
		Clear C			Backstrap B				
Voltage Code		Flash Rate Code				Continuity Code		Finish Code	
24V d.c. 024		60/min 06				None N		Natural Black N	
110V a.c. 110		Other flash rates available, please						Red R	
240V a.c. 240								Blue B	
								Yellow Y	
								Grey G	
								White W	
								Special Finish* S	
								*(Please specify)	

Standard Models

Series	Model Number	Order Code	Description
XB11	XB11UL02406RNBNNNR	109201-001	Strobe, Red lens, 29 candela, 24 VDC, Red Finish
XB11	XB11UL02406CNBNNNR	109201-002	Strobe, Clear lens, 29 candela, 24 VDC, Red Finish
XB11	XB11UL02406RNBNNNN	109201-003	Strobe, Red lens, 29 candela, 24 VDC, Black Finish
XB11	XB11UL11006ANBNNNR	109201-007	Strobe, Amber lens, 20 candela, 110VAC, Red Finish
XB11	XB11UL11006RNBNNNR	109201-008	Strobe, Red lens, 29 candela, 110VAC, Red Finish



WE ENCOURAGE AND SUPPORT NICET CERTIFICATION
3 YEAR WARRANTY

XB11 02/08



NJ Location
273 Branchport Ave.
Long Branch, NJ 07740
P: 800-631-2148
F: 732-222-8707
www.coopernotification.com

FL Location
7565 Commerce Ct.
Sarasota, FL 34243
P: 941-487-2300
F: 941-487-2389

VA Location
P: 877-459-7726
F: 703-294-6560