

General

The Manual Actuator (MA3033T) is used to actuate clean agent fire suppression systems. The purpose of the MA3033T is to extend its pin into the electric actuator on the cylinder valve.

Application

The MA3033T plunger is pressed which actuates the electric valve pin. This allows the cylinder valve to open and discharge NOVEC™ 1230 through the cylinder valve outlet into the pipe network and out of the nozzle into the protected space.

Features

Material: Brass, Stainless Steel

Connection: Mounts on Electric Actuator ONLY


Ambient Temperature Range: 0°F – 130°F (-17.8°C-54.4°C)

Standards/ Listings/ Approvals

UL Listed

Installation

Before installing the MA3033T, verify the safety pin is locked into place. Proper installation and maintenance must be in accordance with SEVO systems Manuals, as well as applicable ISO and NFPA standards.

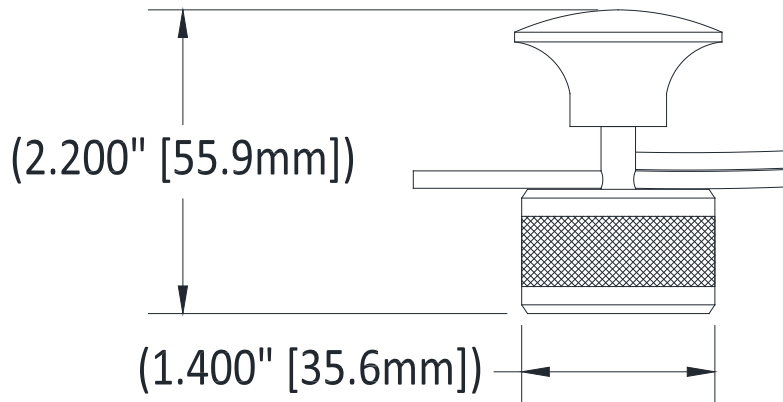

FOR USE BY ARCHITECTS AND ENGINEERS